

March 7, 2022

BID DATE: March 22, 2022

BID TIME: 2:00:00 pm

ADDENDUM #2

To the PLANS and SPECIFICATIONS
for the

Sylvan Union School District

Standiford Elementary School Pavement Replacement Project & Site Improvements

BID #2021-22 #10

GENERAL

The following addendum to the Plans and Specifications shall take precedence over and be amended to the original Plans and Specifications.

ITEM #0.1: Spec 00 11 16 – Notice to Bidders, Item #3: To bid on this Project, the Bidder is required to possess one or more of the following State of California Contractor Licenses:

A and/or B

The Bidder's license(s) must remain active and in good standing throughout the term of the Contract.

ITEM #0.2: Basketball Hoop Nets: Contractor shall provide new nylon basketball nets and install on existing basketball hoops. (Use PW Athletic Equipment, Item #34). Provide (12) total.

ITEM #0.3: Volleyball Nets: Contractor shall provide (3) new volleyball nets, Item #8361-10 by PW Athletic Equipment.

ITEM #0.4: Tennis Nets: Contractor shall provide (3) new tennis nets, Item #8352 by PW Athletic Equipment.

CIVIL:

ITEM #1.0: Clarification, Sheet C4.0 – Proposed Keynote #10: Prior to new seal coat, contractor shall clean all debris and weeds from cracks, grind any raised edges (smooth) and provide sealant in cracks to fill cracks.

ITEM #1.1: Sheet C3.0 - Play Courts: Contractor demo and remove select basketball hoop posts, volleyball posts & tetherball posts. **See attached EXHIBIT "A"**

ITEM #1.2: Sheet C4.0 - Play Courts: Contractor shall install new volleyball, tennis posts and provide new striping for volleyball and tennis courts. Modify Grading Accordingly. **See attached EXHIBIT "B"**

ITEM #1.3: Sheets C3.0 & C4.0 – Area West of (E) Library: Contractor shall remove existing pavement on west side of existing library and replace with new concrete **See attached EXHIBIT "C"**

SPECIAL NOTE:

It is the responsibility of each Bidder to acknowledge all addenda on the BID FORM.


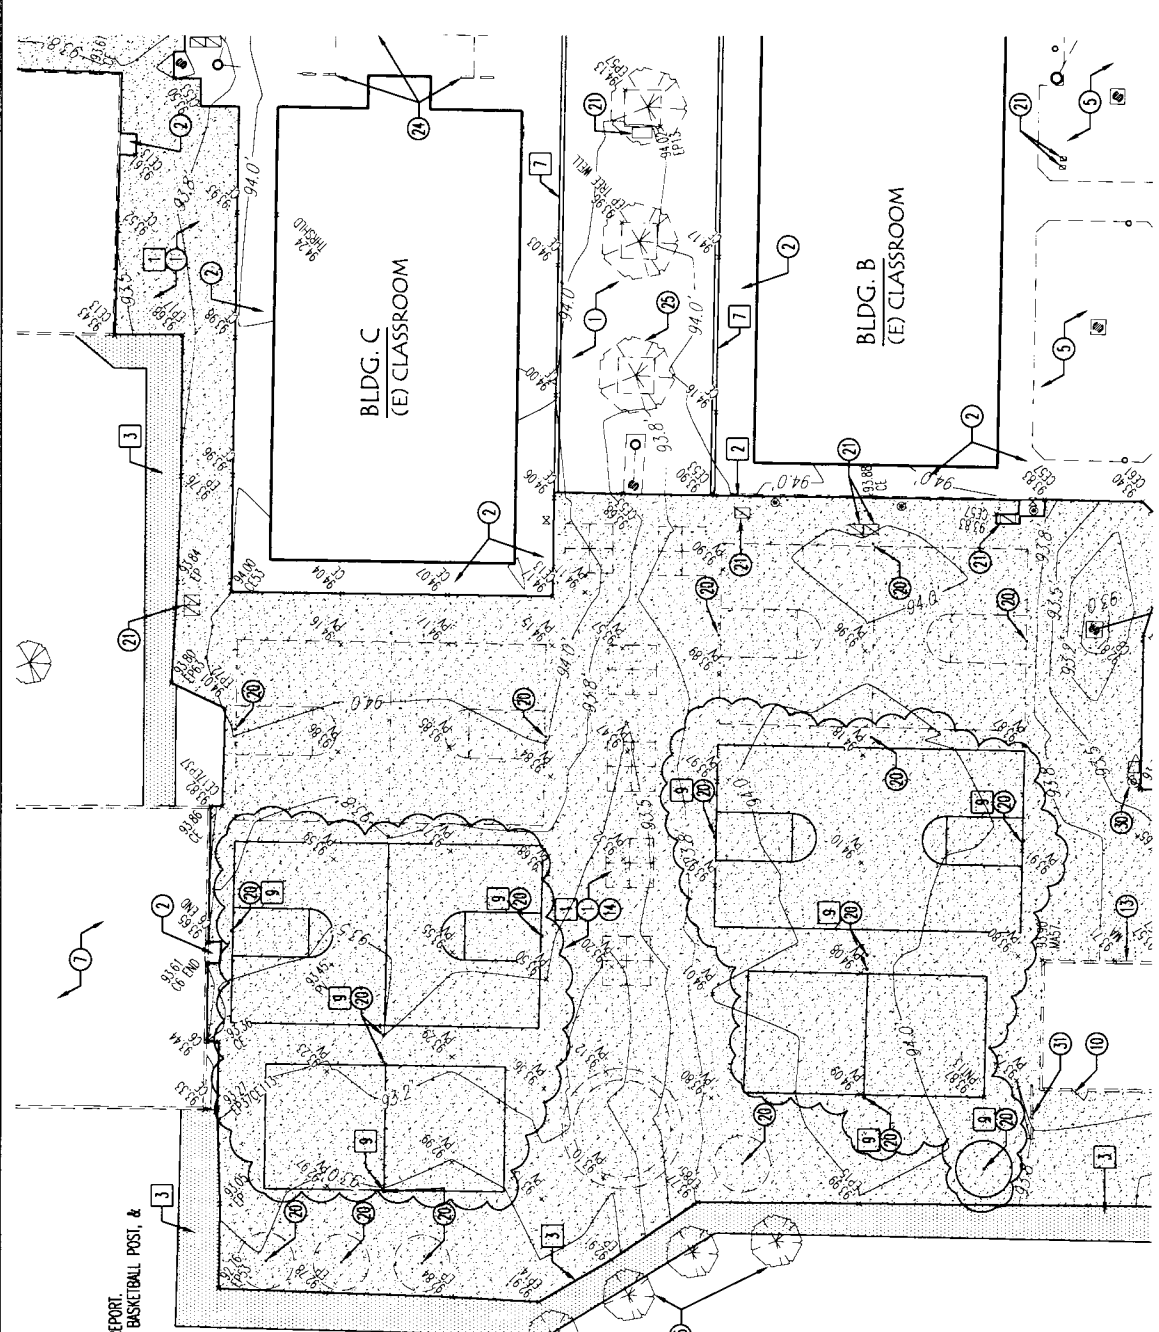


EXHIBIT "A"

PARTIAL TOPOGRAPHY & DEMOLITION PLAN
 SCALE: 1" = 30'-0"



DEMOLITION:

- 1 DEMO/REMOVE A.C. PAVEMENT, BASE, & SUBGRADE FOR NEW SECTION & CEMENT TREATMENT AS RECOMMENDED BY GEOTECH REPORT.
 - ALL EX. UTILITY BOXES, DRAIN INLETS, CLEANOUTS, MANHOLES, BASKETBALL POST, & VOLLEYBALL/TEHERBALL POSTS SHALL REMAIN.
 - CONTRACTOR SHALL ASSUME EXISTING AC IS 4" THICK
- 2 SAWCUT CONCRETE/PAVEMENT (NO OVERTURS)
- 3 REMOVE 8'-0" WIDE SECTION OF TURF FOR RE-GRADING WIDTH SHALL BE FROM NEW MONSTRIP LOCATION. EXISTING IRRIGATION SHALL BE ADJUSTED TO NEW GRADES.
- 4 DEMO/REMOVE (E) CONC. FLATWORK.
- 5 ROLL BACK / REMOVE (E) CHAIN LINK FENCE FABRIC FOR NEW CONCRETE FLATWORK (SEE GRADING PLAN) & RESTRETCH & REINSTALL. EXISTING POSTS & RAILS TO REMAIN. PROVIDE NEW TIES AT 16' O.C. AT ALL POSTS & RAILS. NOTE IT IS THE RESPONSIBILITY OF THE CONTRACTOR TO PROVIDE TEMP FENCING TO KEEP THE SITE SECURE WHEN FENCE FABRIC IS REMOVED.
- 6 REMOVE (E) CHAIN LINK FENCE FABRIC FOR NEW GRADING WORK (SEE GRADING PLAN) & RESTRETCH & REINSTALL. EXISTING POSTS & RAILS TO REMAIN. PROVIDE NEW TIES AT 16' O.C. AT ALL POSTS & RAILS.
- 7 SAWCUT & REMOVE 12" WIDE OF (E) AC PAVEMENT AT PERIMETER. SEE GRADING PLAN FOR NEW WORK.
- 8 REMOVE (E) PORTABLE RAMP WITH METAL DECK & HANDRAIL. RETAIN TO REINSTALL.
- 9 DEMO & REMOVE (E) BASKETBALL, VOLLEYBALL AND TEHERBALL POSTS & FOOTINGS.



**Know what's below.
 Call before you dig.**

NOTE:
 SEE SHEET C3.0 FOR
 INFORMATION NOT SHOWN

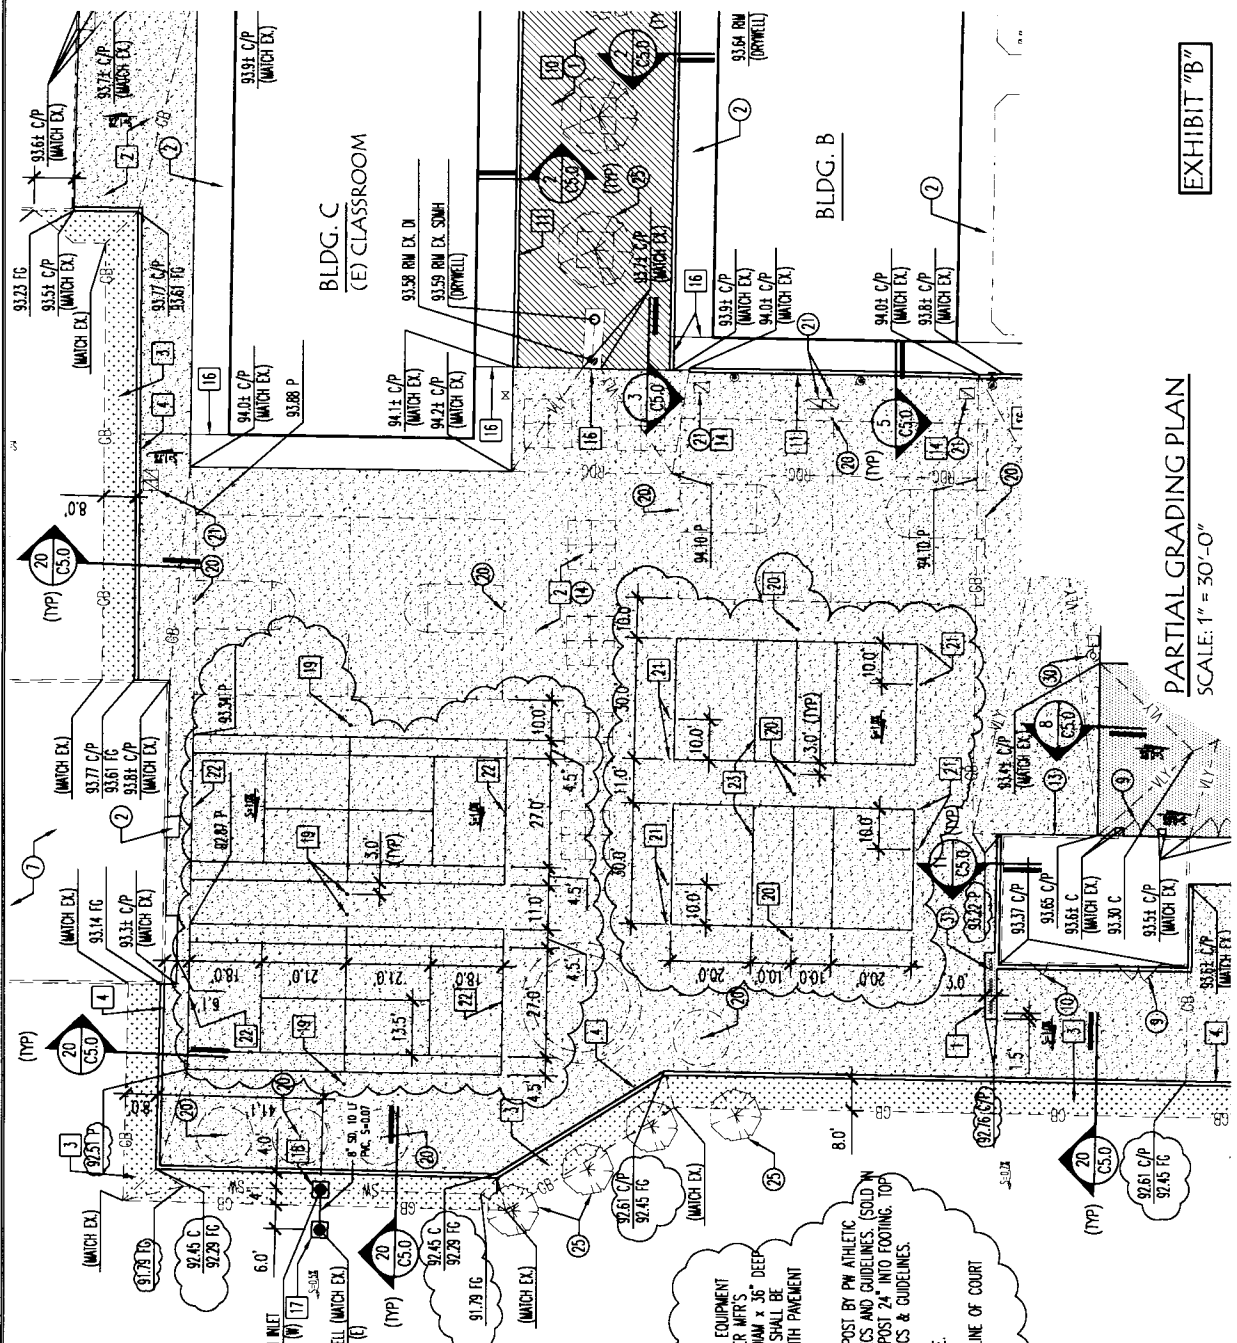

PARTIAL GRADING PLAN
 SCALE: 1" = 30'-0"

EXHIBIT "B"




Know what's below.
 Call before you dig.

- PROPOSED:**
- 19 NEW HEAVY DUTY 3" DAM TENNIS POST BY PM ATHLETIC EQUIPMENT (MODEL 2206-GR) POWDER COATED GREEN INSTALLED PER MFR'S SPECS AND GUIDELINES. (SOLID IN PARS) PROVIDE 30" DIAM X 36" DEEP FOOTING, EMBED POST 18" INTO FOOTING, TOP OF POST SHALL BE 42" ABOVE GRADE, BOTTOM EYEBOLT SHALL BE FLUSH WITH PAVEMENT PER MFR'S SPECS & GUIDELINES.
 - 20 NEW HEAVY DUTY GALVANIZED 2 7/8" DAM VOLLEBALL POST BY PM ATHLETIC EQUIPMENT (MODEL 2214-21) INSTALLED PER MFR'S SPECS AND GUIDELINES. (SOLID IN PARS) PROVIDE 30" DIAM X 36" DEEP FOOTING, EMBED POST 24" INTO FOOTING, TOP OF POST SHALL BE 8'-6" ABOVE GRADE PER MFR'S SPECS & GUIDELINES.
 - 21 2" WIDE X 6" LONG WHITE STRIPE, 'B' FROM COURT EDGE.
 - 22 2" WIDE X 4" LONG WHITE STRIPE, CENTERED ON BACK LINE OF COURT
 - 23 2" WIDE WHITE COURT STRIPING (TYP)

NOTE:
 SEE SHEET C4.0 FOR
 INFORMATION NOT SHOWN



EXHIBIT "C"

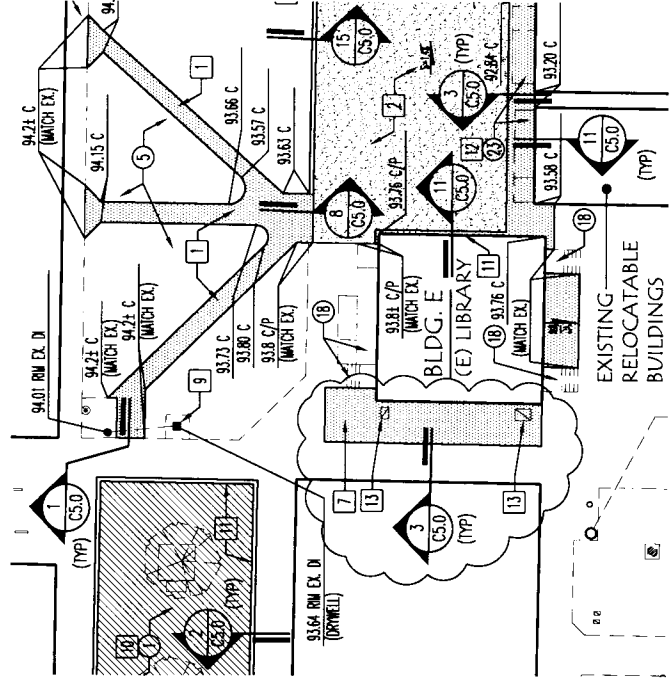

PROPOSED:

- 7 REMOVE (E) PAVEMENT, INSTALL NEW 4" CONCRETE SLAB WITH #3 AT 18" O.C. EACH WAY, CENTERED IN SLAB OVER COMPACTED NATIVE (SSS), CONTRACTOR IS TO TAKE SPECIAL CARE TO PRESERVE & PROTECT FROM DAMAGE (E) UTILITIES / CONDUIT IN THIS AREA.
 -ADJUST ALL EX. UTILITY BOXES SHALL BE ADJUSTED TO NEW GRADE.
- 13 REPLACE (E) UTILITY BOX & PROVIDE CONCRETE CHRISTY BOX LID USE CHRISTY 840 BOX WITH CONCRETE READER LID, ONE STAMPED "GAS" AND ONE STAMPED "WATER"



Know what's below.
 Call before you dig.

PARTIAL GRADING PLAN
 SCALE: 1" = 30'-0"

NOTE:
 SEE SHEET C4.0 FOR
 INFORMATION NOT SHOWN